


GENERAL FEATURES

- Environmentally friendly
- Able to operate at 60°C
- Integrated design to ensure the best uniformity and reliability
- Long life and high stability under high temp. environment (no air-con needed)
- Use super-C additives: Deep discharge recovery capability

DIMENSIONS & WEIGHT

Length(mm)	260±1
Width(mm)	169±1
Height(mm)	211±1
Total Height(mm)	215±1
Weight(kg)	25,1±3%

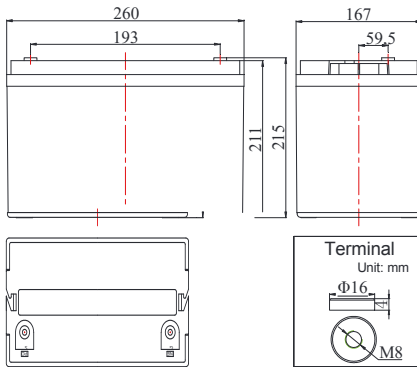

COMPLIED STANDARDS

IEC 60896-21/22	JIS C8704
YD/T71360	BS6290 part4
GB/T 19638	UL 1989

APPLICATIONS

- Solar & Wind energy system
- BTS Stations
- UPS system
- Telecom systems
- Wheel chair & Golf Car
- Marine Equipment
- Railway Systems



TECHNICAL SPECIFICATIONS



Nominal Voltage		12V(6 cells per unit)
Design Floating Life @25°C		15 Years
Nominal Capacity @25°C (20 hour rate@3.9A,10.00V)		80Ah
Capacity @25°C	10 hour rate (6,83A,10.8V)	68,3Ah
	5 hour rate (11,9A,10.5V)	59,5Ah
	1 hour rate (41,7A,9.6V)	41,7Ah
Internal Resistance	Full Charged Battery@25°C	≤8.0mΩ
Ambient Temperature	Discharge	-30°C~60°C
	Charge	-30°C~60°C
	Storage	-30°C~60°C
Max.Discharge Current@25°C		750A(5s)
Capacity affected by Temperature (10 hr Capacity)	40°C	108%
	25°C	100%
	0°C	90%
	-15°C	70%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 16.9A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 16.9A Voltage 14.4-14.9V

BATTERY DISCHARGE TABLE







Discharge Constant Current per Cell (Amperes at 25°C)

F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h	100h
1.60V	96.5	61.7	45.3	41.7	26.5	18.6	12.6	8.3	7.43	3.98	0.90
1.67V	94.8	60.5	44.5	40.9	26.0	18.2	12.4	8.2	7.28	3.90	0.89
1.70V	93.0	59.4	43.7	40.1	25.5	17.9	12.2	8.0	7.13	3.83	0.86
1.75V	91.3	58.3	42.8	39.4	25.0	17.6	11.9	7.9	7.05	3.75	0.85
1.80V	87.8	56.0	41.2	37.9	24.0	16.9	11.5	7.6	6.83	3.71	0.83

Discharge Constant Power per Cell (Watts at 25°C)

F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h	100h
1.60V	185.8	118.7	87.2	80.0	50.9	35.7	24.3	16.0	14.3	7.8	1.73
1.67V	182.4	116.5	85.6	78.6	50.0	35.1	23.9	15.8	14.0	7.6	1.70
1.70V	179.0	114.3	84.0	77.1	49.1	34.4	23.4	15.5	13.8	7.5	1.67
1.75V	175.7	112.1	82.4	75.7	48.1	33.8	23.0	15.2	13.5	7.4	1.64
1.80V	168.9	107.9	79.3	72.8	46.3	32.5	22.1	14.6	13.0	7.2	1.61

PERFORMANCE CHARACTERISTICS

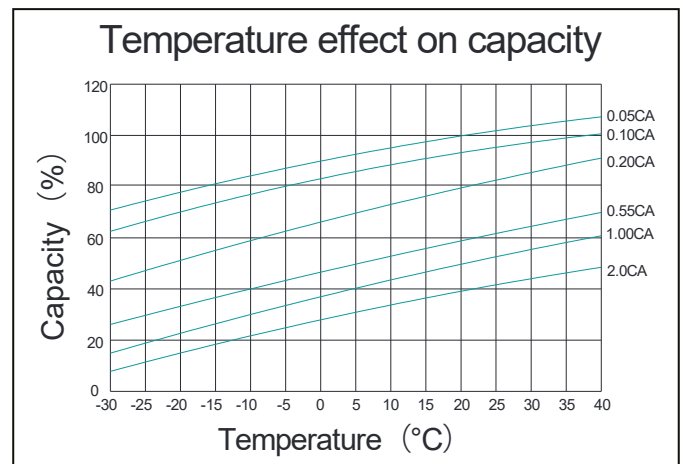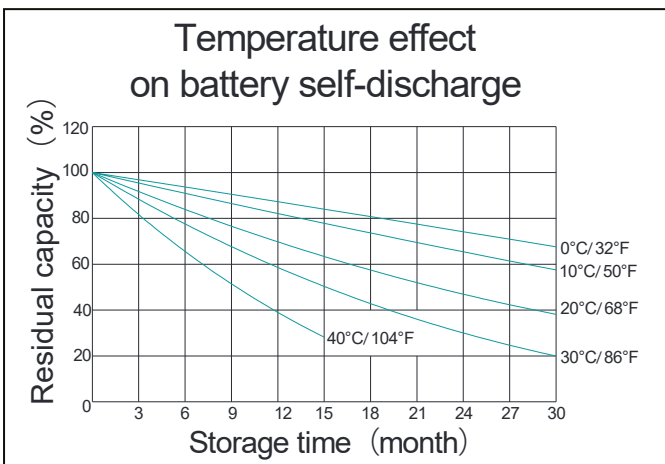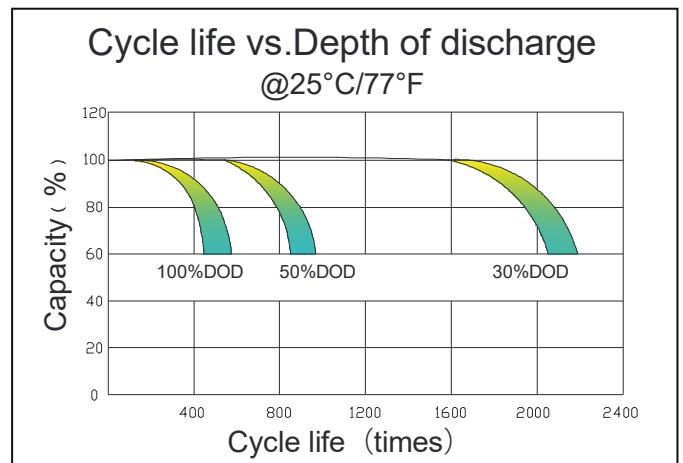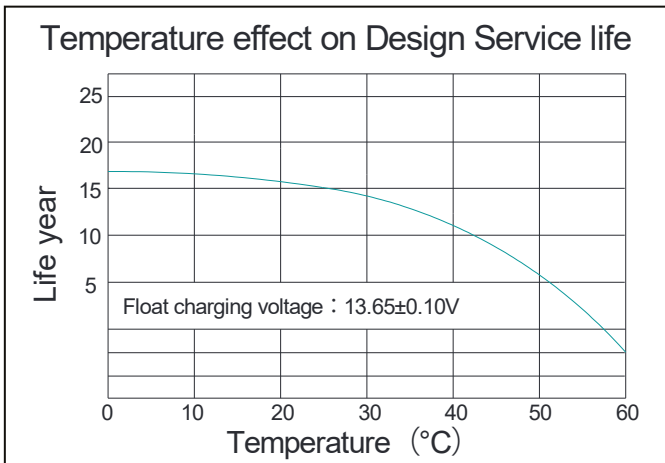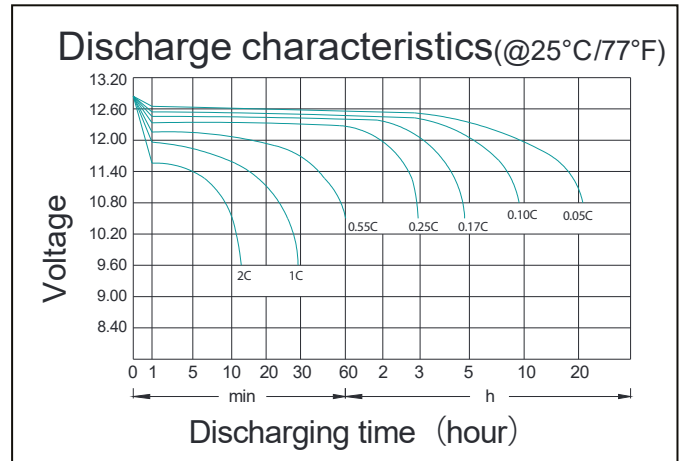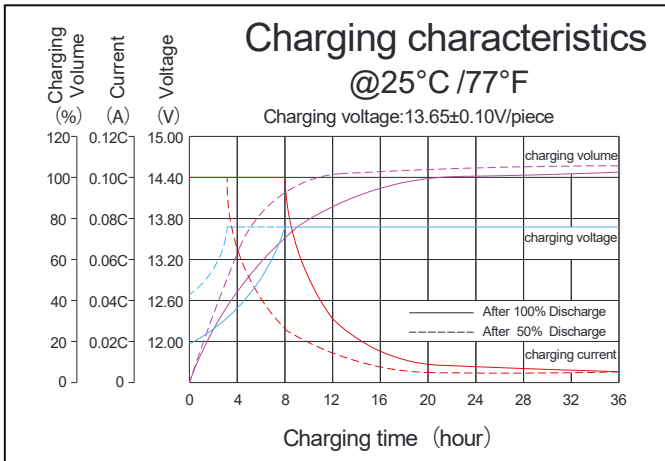

BATTERY CONSTRUCTION

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	ABS (UL94-V0 optional)	Flame Si-Rubbeand aging resistancer	Female Copper Insert M8(torque:7~9N.m)	Advanced AGM separator for high pressure cell design	Dilute high purity sulphuric acid with fumed Silica gel	Two layers epoxy resin seal